

Cardiac Muscle Physiology



Faisal Mohammed, MD, PhD
Alaa Bawaneh, MD.PhD

Objectives:

By The end of this lecture students should be able to:


- Distinguish the cardiac muscle cell microstructure
- Describe cardiac muscle action potential
- Point out the functional importance of the action potential
- Outline the intracellular calcium homeostasis

Wall of the heart

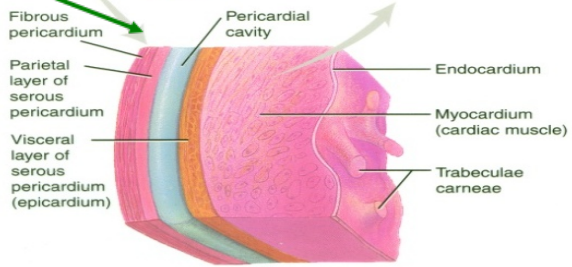

(a) Portion of pericardium and heart wall

Cardiac Muscle Cells

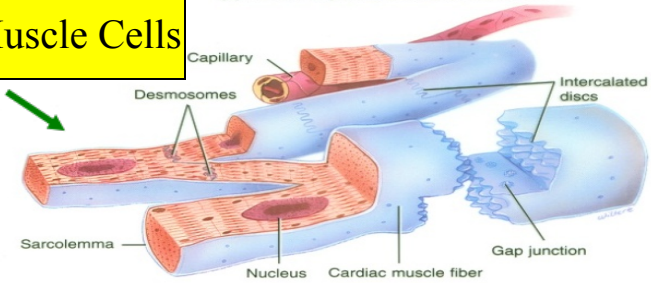

(b) Cardiac muscle fibers

Layers of the Heart Wall

- Epicardium (external layer)...prevent the heart from overstretching as we will see later when we discuss Frank-Starling law of the heart.

 - Visceral layer of serous pericardium



 - Smooth, slippery texture to outermost surface

- Myocardium

 - 95% of heart is cardiac muscle

- Endocardium (inner layer)

 - Smooth lining for chambers of heart, valves and continuous with lining of large blood vessels



Cardiac Muscle Tissue and the Cardiac Conduction System

- Histology
 - Shorter and less circular than skeletal muscle fibers
 - Branching gives “stair-step” appearance
 - Usually, one centrally located nucleus
 - Ends of fibers connected by intercalated discs
 - Discs contain desmosomes (hold fibers together) and gap junctions (allow action potential conduction from one fiber to the next) → **syncytium**
 - Mitochondria are larger and more numerous than skeletal muscle
 - Same arrangement of actin and myosin



MAGNIFIED VIEW OF CARDIAC MUSCLE CELLS




Desmosome



Gap junction

T-tubule

are highly branched invaginations of cardiomyocyte sarcolemma that are rich in ion channels important for excitation-contraction (EC) coupling, maintenance of resting membrane potential, action potential initiation and regulation, and signaling transduction


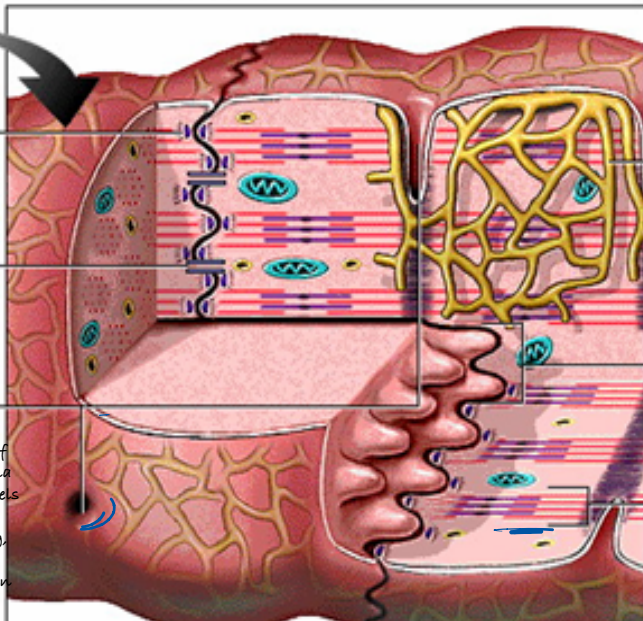


Sarcoplasmic reticulum

Intercalated disc

Cardiac myofibril



Cardiac muscle, like skeletal muscle, is striated. Unlike skeletal muscle, its fibers are shorter, they branch, and they have only one (usually centrally located) nucleus. Cardiac muscle cells connect to and communicate with neighboring cells through gap junctions in intercalated discs.

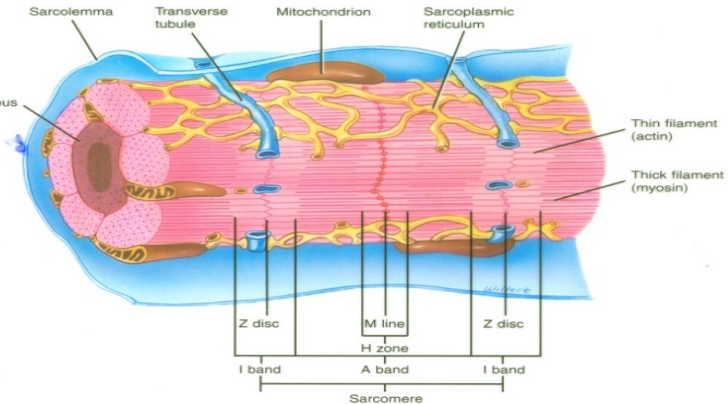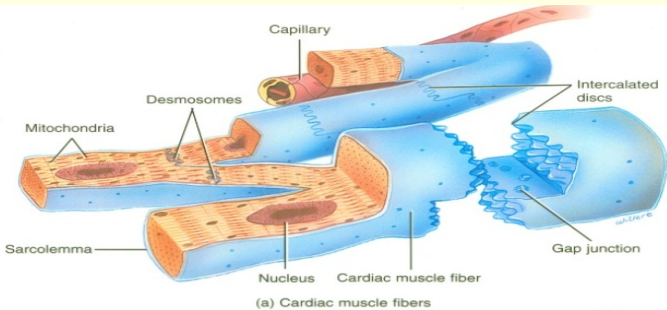


(b) Diagram based on an electron micrograph


play an important role in impulse conduction

Gap junction channels

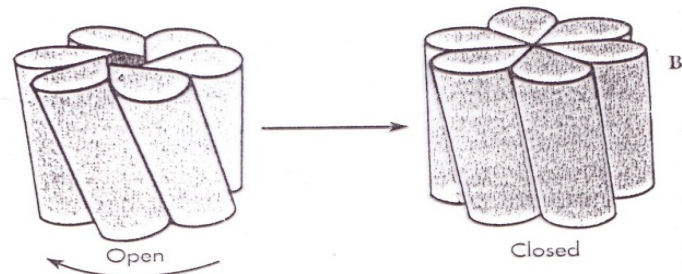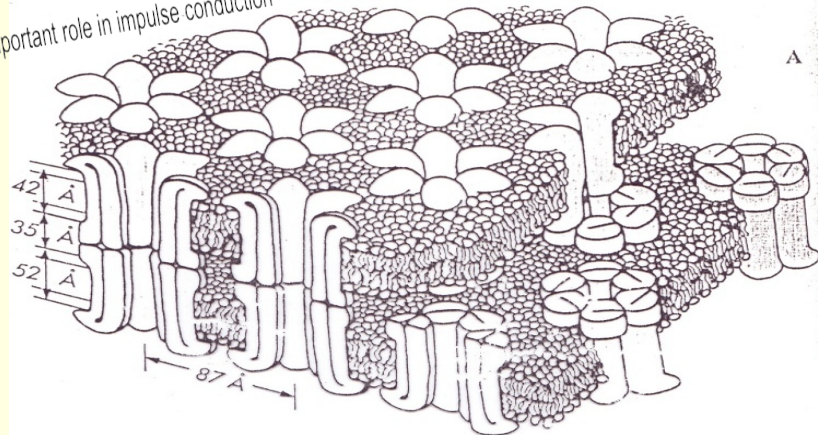


Permeability Changes and Ionic Fluxes During an Action Potential (skeletal Muscle)

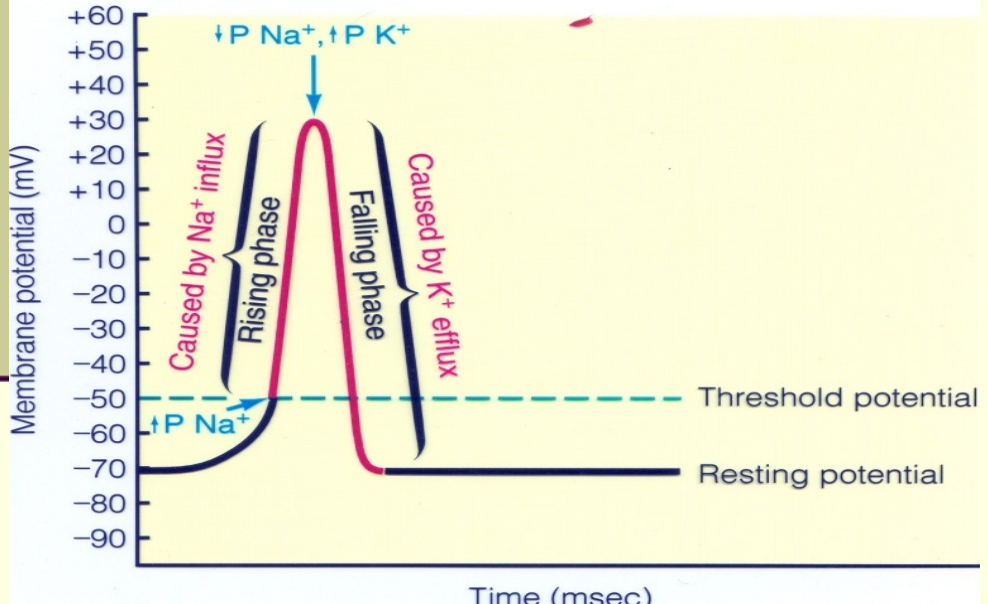

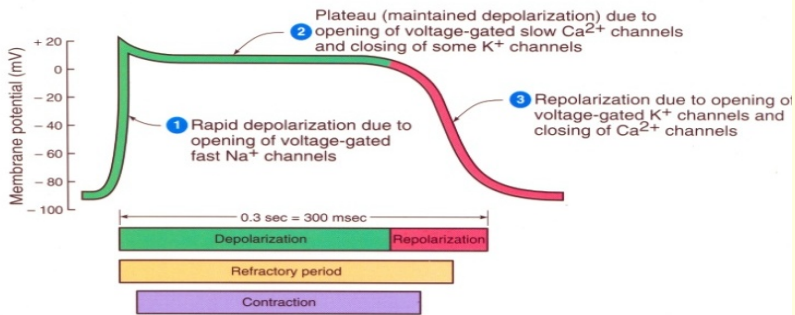


(a) Action potential, refractory period, and contraction

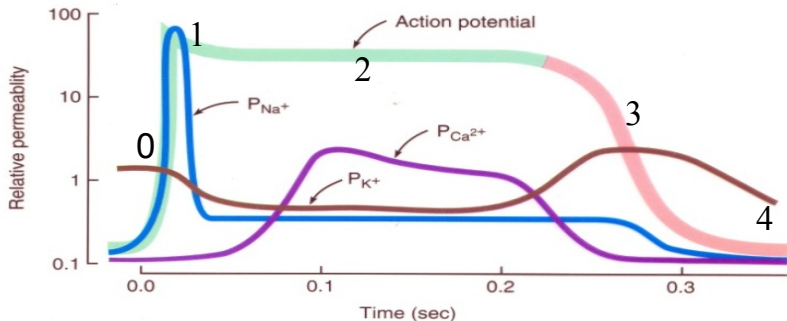


(b) Membrane permeability (P) changes


The Action Potential in Skeletal and Cardiac Muscle

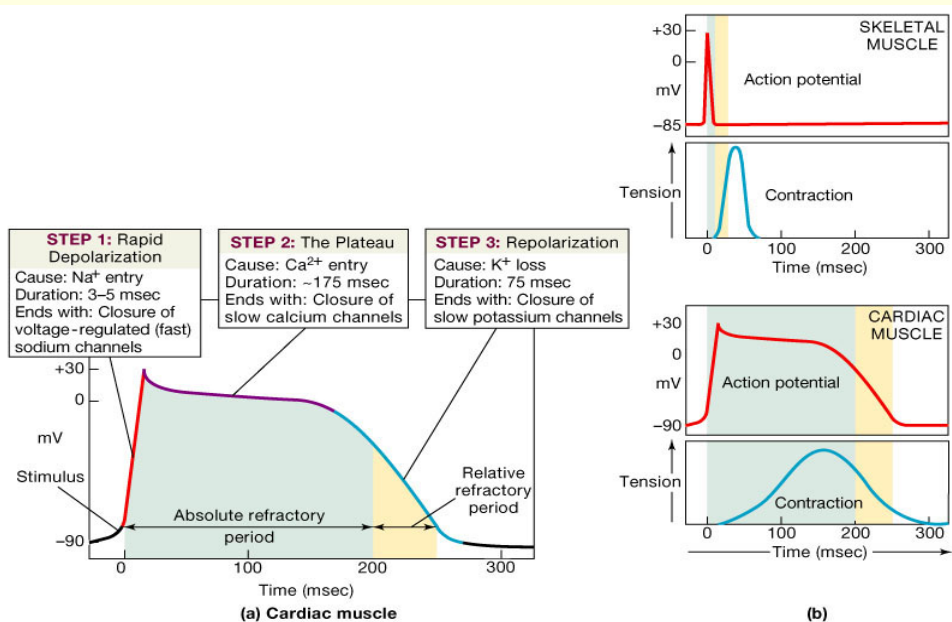


Skeletal muscle fast-twitch fiber

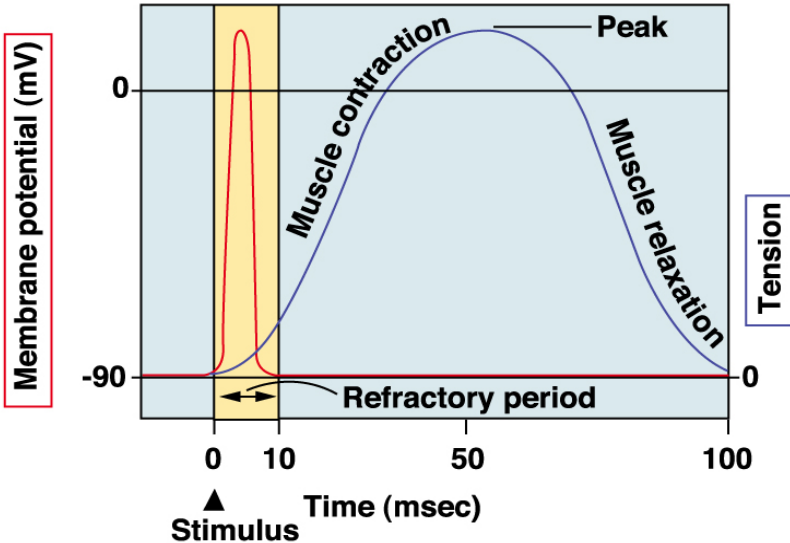


**Tetanus in a skeletal muscle.
Action potentials not shown.**

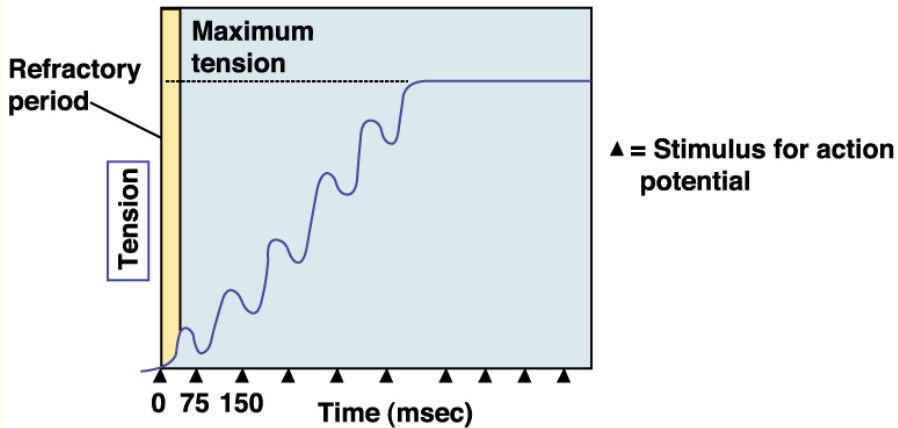

Cardiac muscle fiber

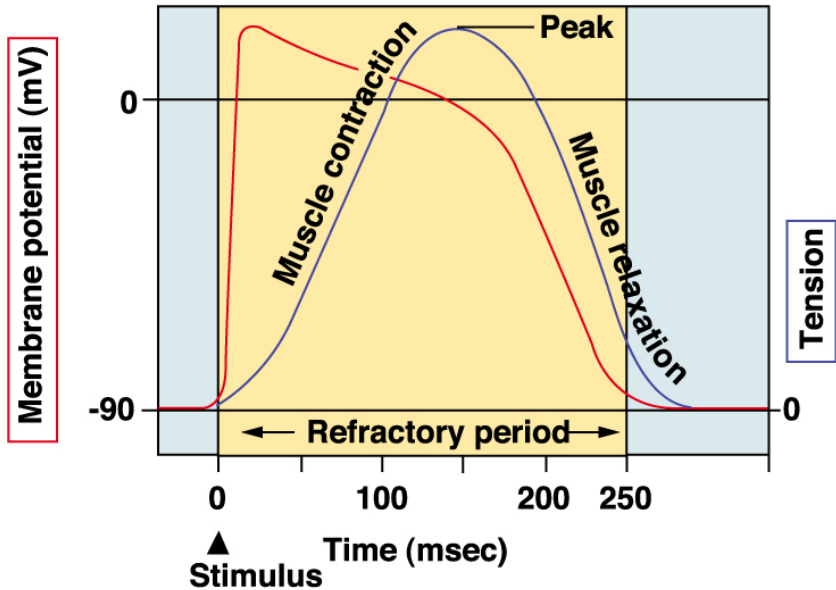

Long refractory period in a cardiac muscle prevents tetanus.

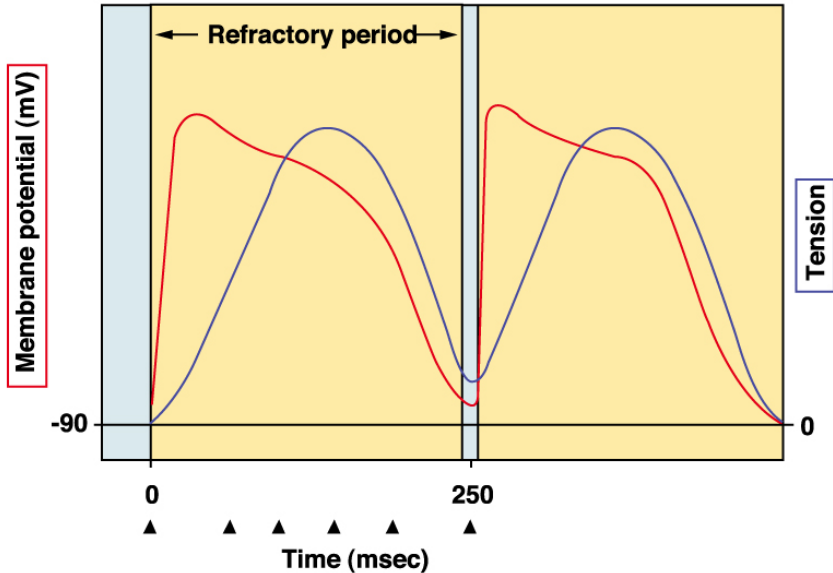

Cardiac and Skeletal Muscles

Differences

Skeletal muscle

- Neurogenic
(motor neuron-end plate-acetylcholine)
- Insulated from each other
- Short action potential


Cardiac Muscle

- Myogenic
(action potential originates within the muscle)
- Gap-junctions
- Action potential is longer

Functional importance of Cardiac action potential

- The decrease in conductance (permeability) of potassium at phase 0 and 1 of the cardiac action potential contributes to the maintenance of depolarization in phase 2 (plateau)
- The long absolute refractory period prevent the occurrence of tetanus (maintained contraction without a period of relaxation) in the cardiac muscle.
- Skeletal muscle action potential is short that allows tetanus to occur

Conformations of a Voltage-Gated Na⁺ Channel

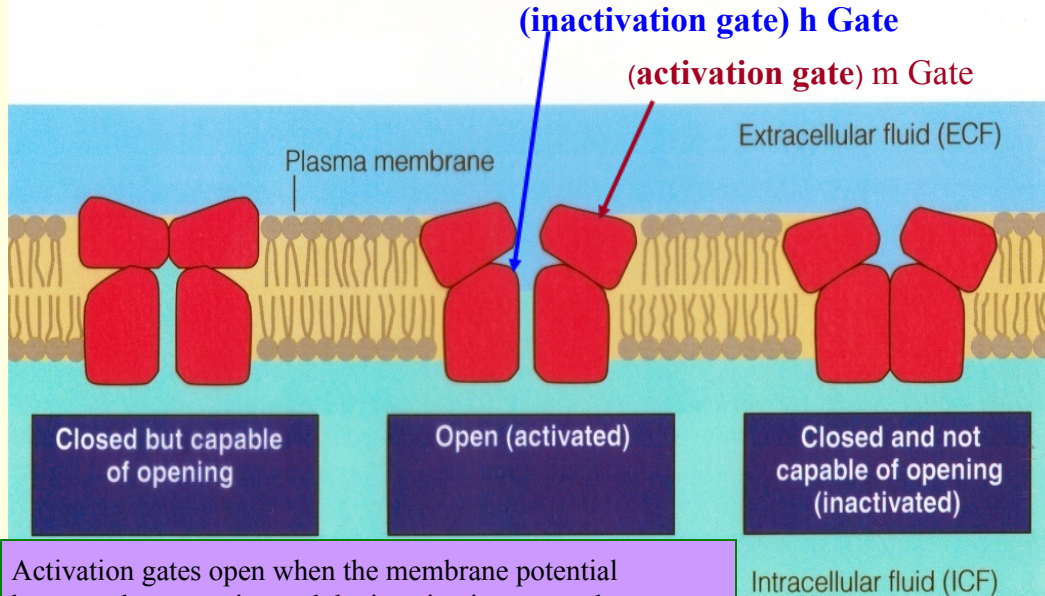


Closed but capable of opening


Open (activated)

Closed and not capable of opening (inactivated)

Activation gates open when the membrane potential becomes less negative and the inactivation gates close when the potential becomes less negative. The activation gate is fast but the inactivation is slow responding


PHASE 0 OF THE FAST FIBER ACTION POTENTIAL

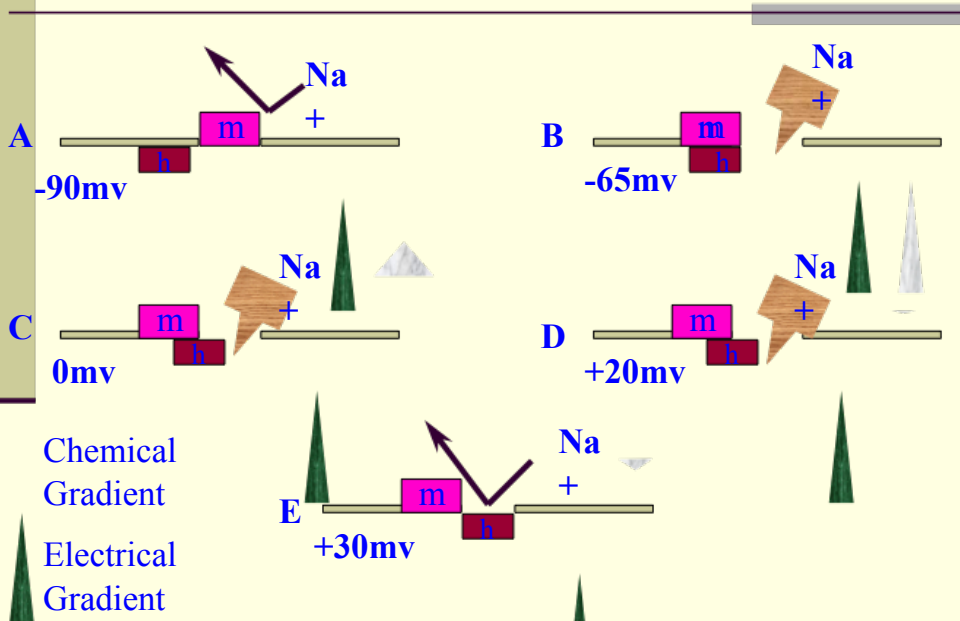

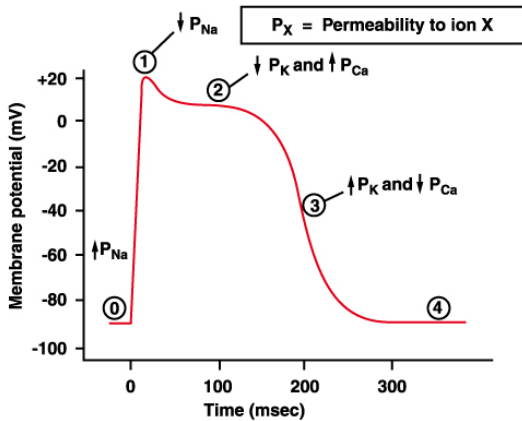


Phase	Membrane channels
①	Na^+ channels open
②	Na^+ channels close
③	Ca^{2+} channels open; fast K^+ channels close
④	Ca^{2+} channels close; slow K^+ channels open
⑤	Resting potential

The importance of calcium influx through the slow voltage gated calcium channels

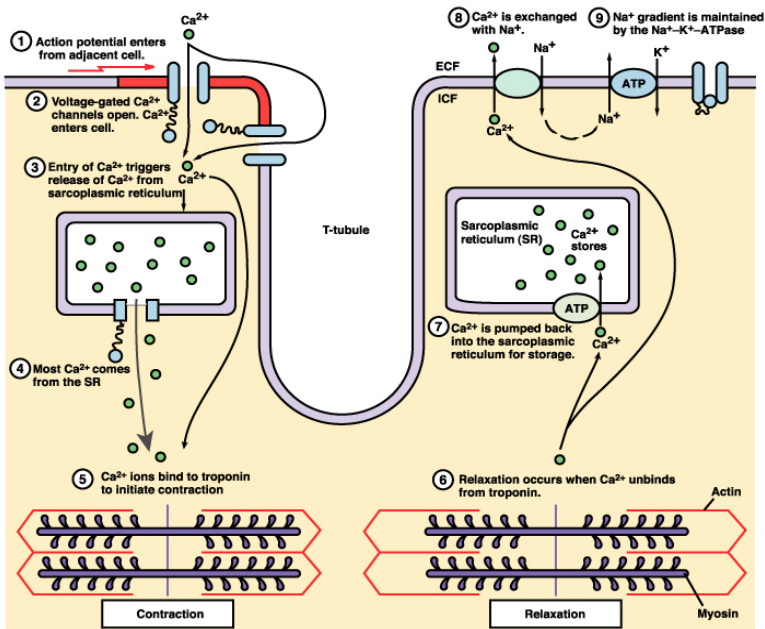


Mechanism of Cardiac Muscle Excitation, Contraction & Relaxation

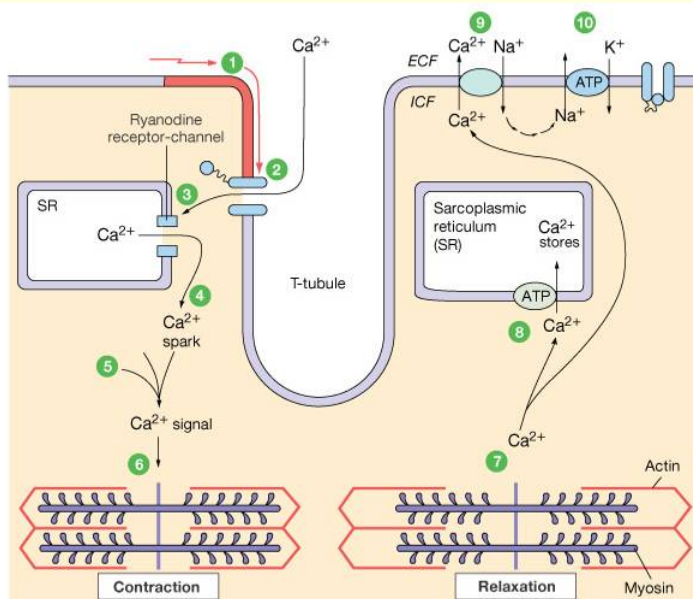


- 1** Action potential enters from adjacent cell.
- 2** Voltage-gated Ca^{2+} channels open. Ca^{2+} enters cell.
- 3** Ca^{2+} induces Ca^{2+} release through ryanodine receptor-channels (RyR).
- 4** Local release causes Ca^{2+} spark.
- 5** Summed Ca^{2+} sparks create a Ca^{2+} signal.
- 6** Ca^{2+} ions bind to troponin to initiate contraction.
- 7** Relaxation occurs when Ca^{2+} unbinds from troponin.
- 8** Ca^{2+} is pumped back into the sarcoplasmic reticulum for storage.
- 9** Ca^{2+} is exchanged with Na^{+} .
- 10** Na^{+} gradient is maintained by the $\text{Na}^{+}\text{-K}^{+}\text{-ATPase}$.

Intracellular Calcium Homeostasis... 1

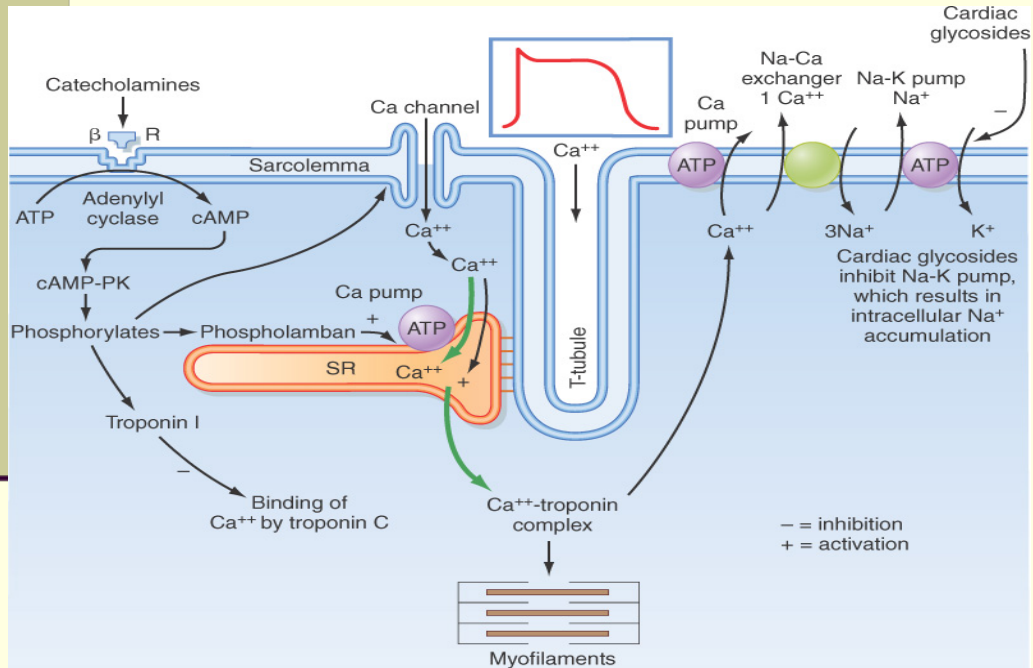

Intracellular Calcium Homeostasis...2

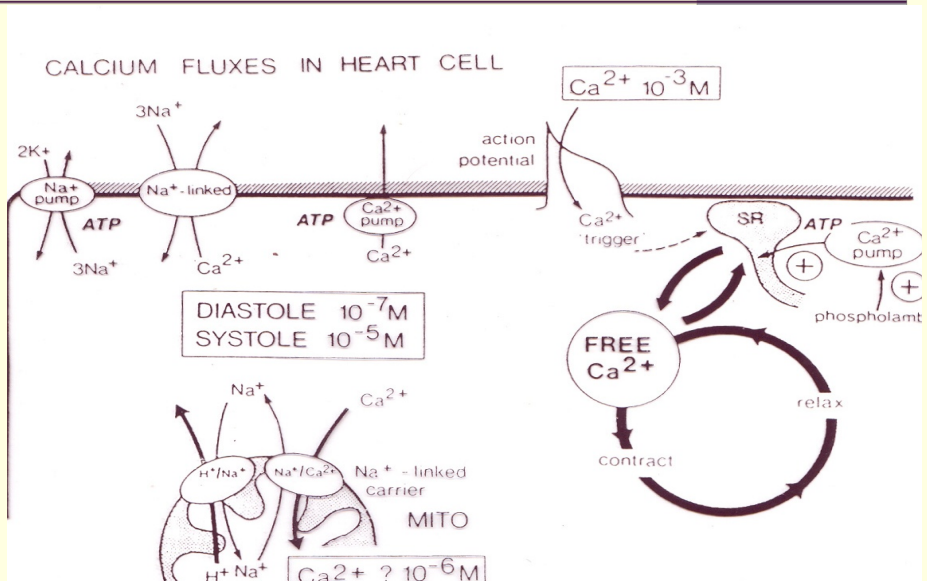

Cardiac Muscle action potential Vs. Skeletal Muscle

- Phase 0 –Depolarization phase (Na^+ influx)
- Phase 1 partial repolarization (Not in skeletal)
- Phase 2 Plateau (\sim depolarization not in skeletal) slow calcium channels
- Phase 3 fast repolarization phase (K^+ repolarization)
- Phase 4 resting membrane potential

Thank You



Conduction System of the Heart

before the action potential get to the contractile fibers how doesn't generate and how it propagate

Faisal I. Mohammed, MD, PhD

Alaa Bawaneh, MD.PhD




Objectives

- List the parts that comprise the conduction system
- Explain the mechanism of slow response action potential (pacemaker potential)
- Point out the regulation of the conduction system potential by Autonomic Nerves

Autorhythmicity (the heart is pumping by itself from a conduction)

- During embryonic development, about 1% of all of the muscle cells of the heart form a network or pathway called the **cardiac conduction system**.

- This specialized group of **myocytes** is unusual in that they have the ability to spontaneously depolarize.

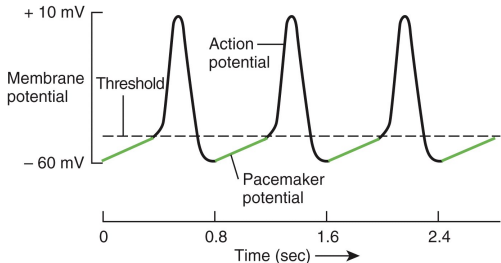


(b) Pacemaker potentials and action potentials in autorhythmic fibers of SA node

Autorhythmicity

- The rhythmical electrical activity they produce is called **autorhythmicity**. (conduction system that makes the action potential & propagate it)
- It does not rely on the central nervous system to sustain a lifelong heartbeat.


How did they know?

During open heart surgery the heart will start pumping by itself

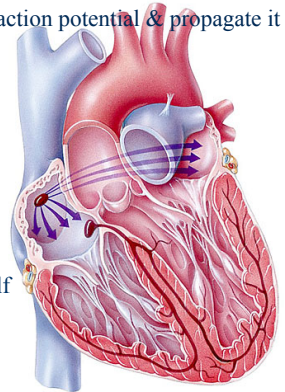

Autorhythmicity

- Autorhythmic cells spontaneously depolarize at a given rate, some groups faster, some groups slower.
- Once a group of autorhythmic cells reaches threshold and starts an action potential (AP), all of the cells in that area of the heart also depolarize.

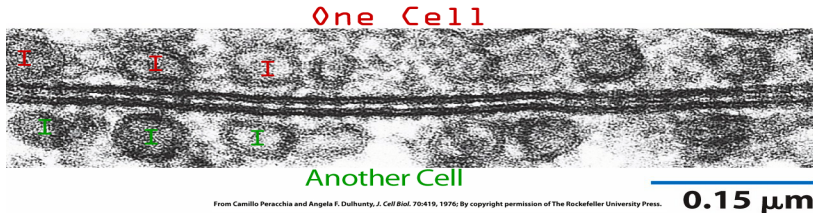


Membrane of two cells clearly seen. The spread of ions through gap junctions of the Intercalated discs (I) allows the AP to pass from cell to cell

Autorhythmic Fibers


- Specialized cardiac muscle fibers
- Self-excitabile
- Repeatedly generate action potentials that trigger heart contractions
- 2 important functions
 - Act as pacemaker (generator of action potential)
 - Form conduction system (for the propagation of the action)

Conducting System of Heart

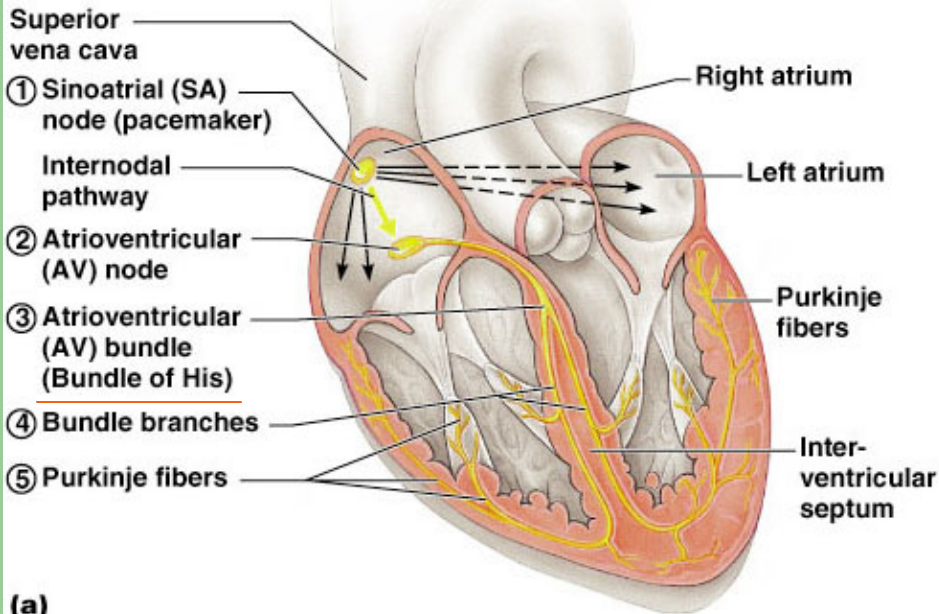

Intrinsic Cardiac Conduction System

Approximately 1% of cardiac muscle cells are autorhythmic rather than contractile

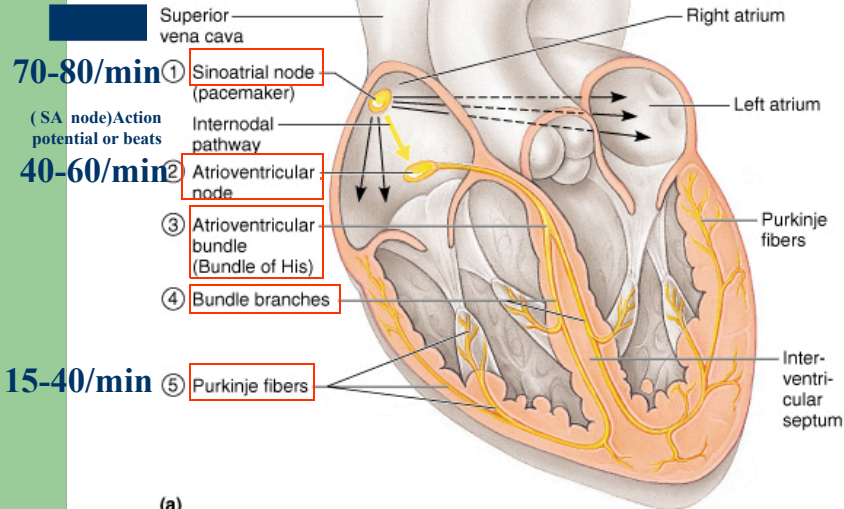

(a)

Approximately 1% of the cardiac muscle cells are autorhythmic rather than contractile. * These specialized cardiac cells don't contract but are specialized to initiate and conduct impulses through the heart to coordinate its activity. * These constitute the intrinsic cardiac conduction system.

These autorhythmic cells constitute the following components of the intrinsic conduction system

the sinoatrial (SA) node, just inferior to the entrance of the superior vena cava into the right atrium *


the atrioventricular node (AV) node, located just above the tricuspid valve *, in the lower part of the right atrium

the atrioventricular bundle (bundle of HIS), located in the lower part of the interatrial septum and which extends into the interventricular septum where it splits into right and left bundle branches * which continue toward the apex of the heart and the Purkinje fibers * which branch off of the bundle branches to complete the pathway into the apex of the heart and turn upward to carry conduction impulses to the papillary muscles and the rest of the myocardium

Although all of these are autorhythmic, they have different rates of depolarization. * For instance, the SA node * depolarizes at a rate of 75/min. * The AV node depolarizes at a rate of 40 to 60 beats per minute, * while the rest have an intrinsic rate of around 30 depolarizations/minute. * Because the SA node has the fastest rate, it serves as the pacemaker for the heart *

Intrinsic Conduction System

Function: initiate & distribute impulses so heart depolarizes & contracts in orderly manner from atria to ventricles

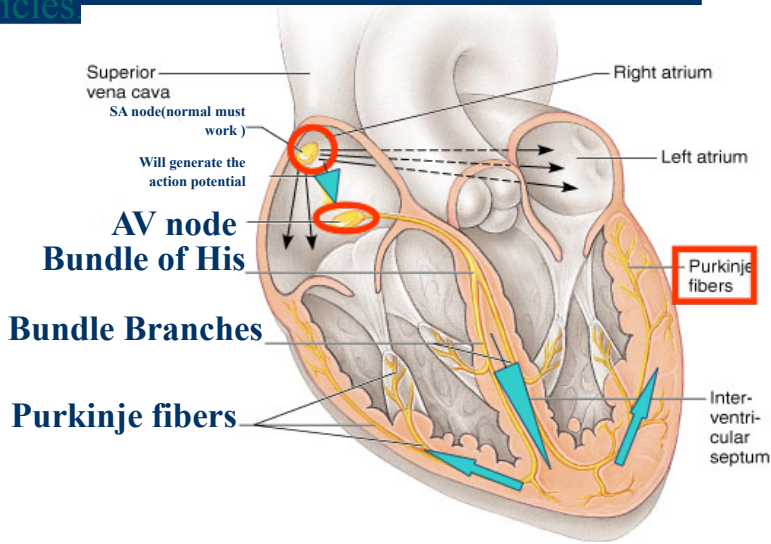

As indicated previously, the function of the intrinsic conduction system is to initiate and distribute impulses, so the heart depolarizes and contracts in an orderly manner from atria to ventricles. * As you must be able to identify the parts of the conduction system and trace the path of depolarization from the SA node to the Purkinje fibers, we will review this

Since the SA node * has the highest rate of depolarization (75/min) , it starts the process by sending a wave of depolarization * through the myocardium of the atria


When this reaches the AV node * it depolarizes * and causes the Bundle of His * to depolarize. The depolarization travels into the septum through the bundle branches * * and from the bundle branches into the Purkinje fibers * * which cause depolarization of the ventricular myocardium

When the cardiac muscle cells of the myocardium, including the papillary muscles, the ventricles contract forcing blood out of the * ventricles


Sinus Node

action potential in
SA node it will open
Na channels

- Specialized cardiac muscle connected to atrial muscle.
- Acts as pacemaker because membrane leaks Na^+ and membrane potential is -55 to -60mV
- When membrane potential reaches -40 mV , slow Ca^{++} channels open causing action potential.
- After $100\text{-}150\text{ msec}$ Ca^{++} channels close and K^+ channels open more thus returning membrane potential to -55mV .

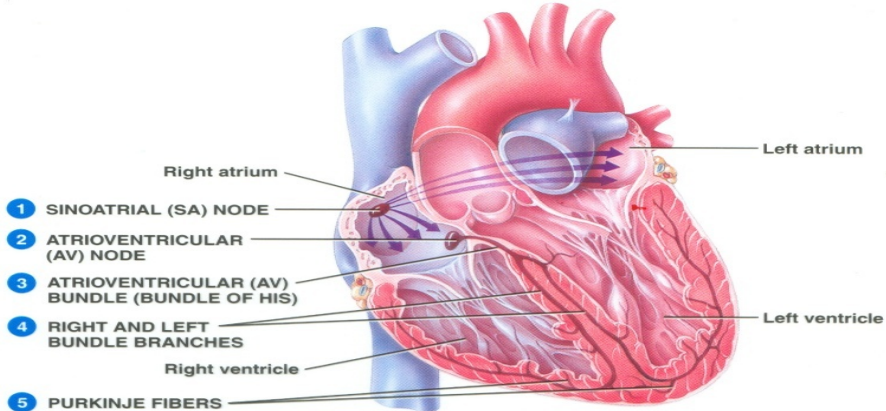

(a) Anterior view of frontal section

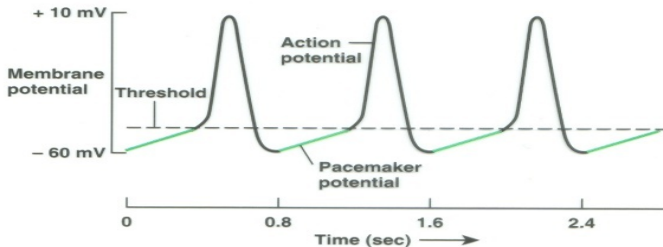

(b) Pacemaker potentials and action potentials in autorhythmic fibers of SA node


resting membrane potential= -55 (1
-60

Before threshold Slow (2
depolarization na leaky channels &
slow Ca channels & Threshold -40 –
455 slow Na & some Ca channels
after threshold Ca channels are
responsible for the depolarization (L
type)

The Ca will close

The K⁺ will open repolarization

Transmission of electrical impulse

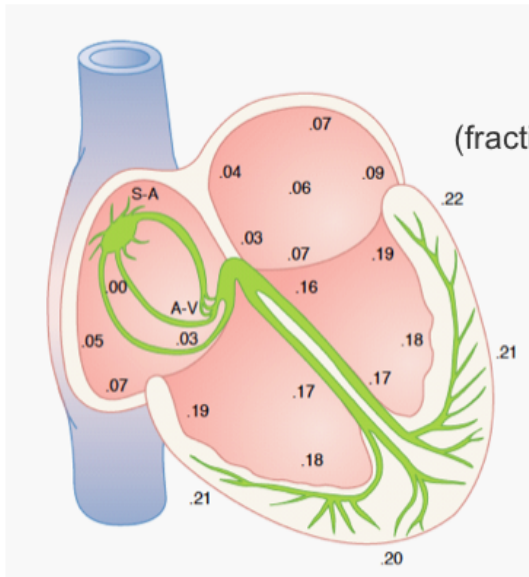


(fraction of second)

Propagation
of action
through artia

Conduction System

- Begins in sinoatrial (SA) node in right atrial wall
- Propagates through atria via gap junctions
- Atria contract
- 2. Reaches atrioventricular (AV) node in interatrial septum
- 3. Enters atrioventricular (AV) bundle (Bundle of His)
 - AV node is the only site where action potentials can conduct from atria to ventricles due to fibrous skeleton
- 4. Enters right and left bundle branches which extends through interventricular septum toward apex
- 5. Finally, large diameter Purkinje fibers conduct action potential to remainder of ventricular myocardium
 - Finally, ventricles contract.


Action potential of pacemaker

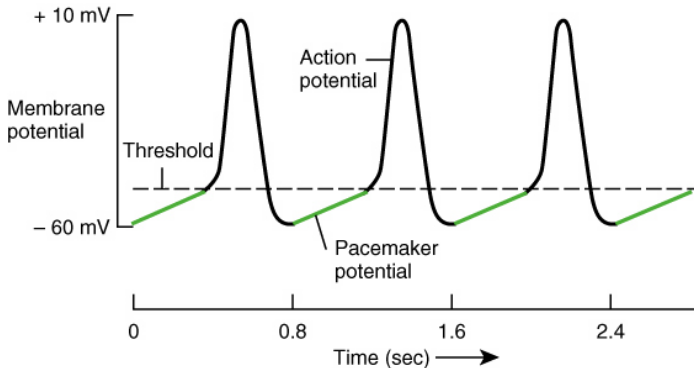


(b) Pacemaker potentials and action potentials in autorhythmic fibers of SA node

20.10b

Fast Response Action Potential of Contractile Cardiac Muscle Cell

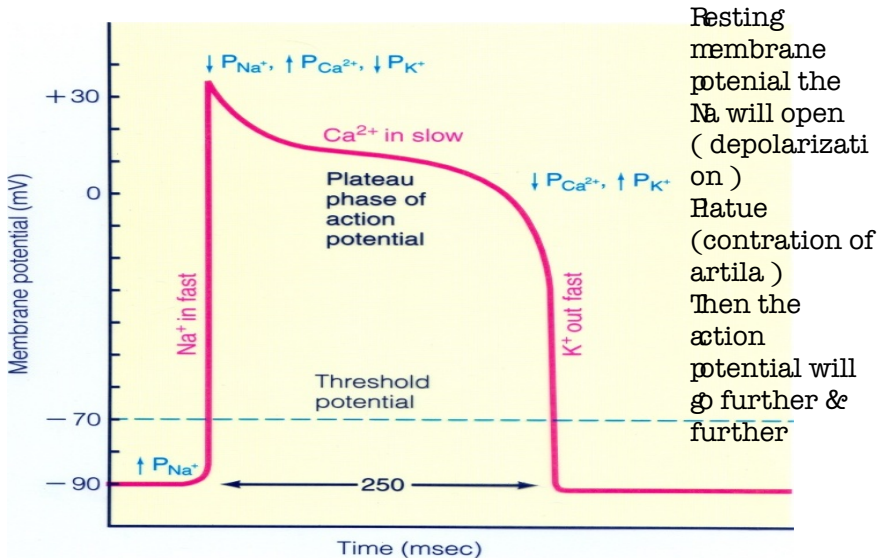


Pacemaker and Action Potentials of the Heart

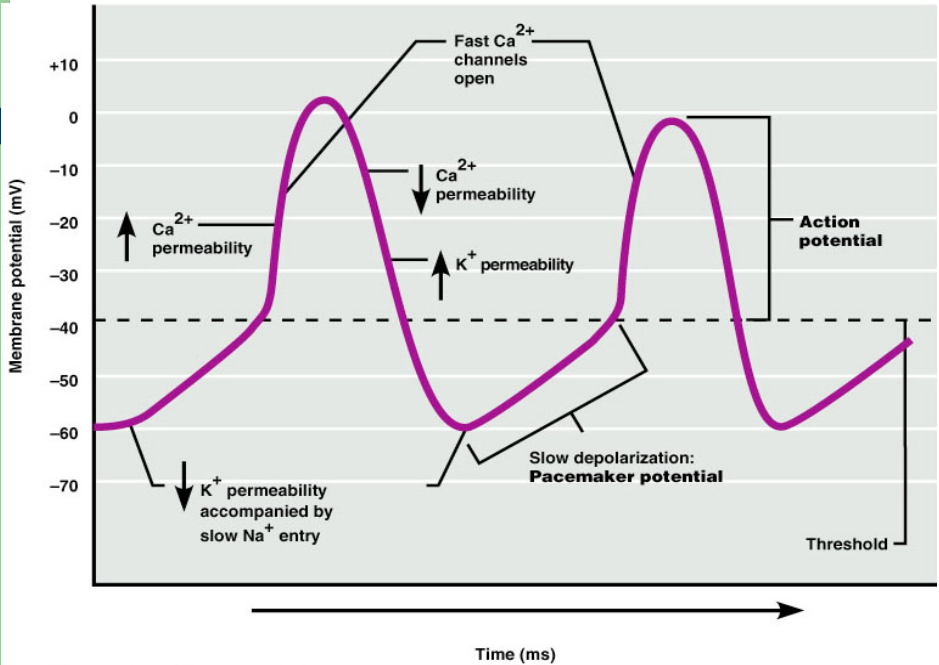

:slow depolarization of the heart is due to HCN (cyclic nucleotide gated channels) channels are sometimes referred to as pacemaker channels because they help to generate rhythmic activity within groups of heart and brain cells. HCN channels are activated by membrane hyperpolarization, are permeable to Na^+ and K^+ , and are constitutively open at voltages near the resting membrane potential
HCN = heart rate control
During depolarization k^+ permeability will decrease

Slow Response Action Potential (Pacemaker Potential) important

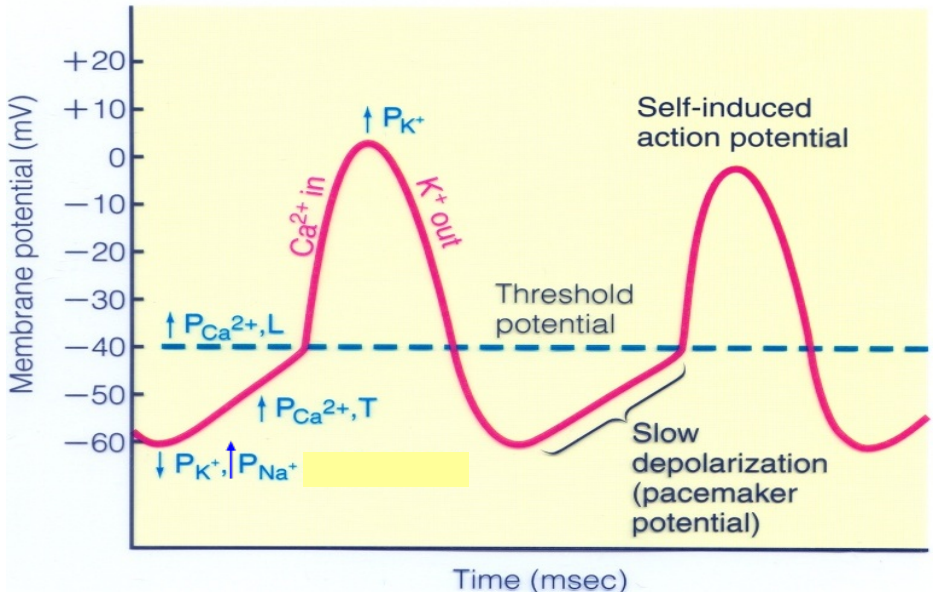

L-type channels are found in all cardiac cells and T-type are expressed in Purkinje cells, pacemaker and atrial cells. Both these types of channels contribute to atrioventricular conduction as well as pacemaker activity

Intrinsic rate and speed of conduction of the components of the system

- SA node 60-80 action potential /min (*Pacemaker*) normal
- AV node 40-60 action potential /min
- Purkinje 15-40 action potential /min


Conduction Speed

- SA node: slow speed of conduction
- Ventricular and Atrial muscle: Moderate speed
- AV node: slowest speed of conduction
- Purkinje fibers: Fastest speed of conduction
- *Ectopic Pacemaker- Abnormal site of pacemaker*


Highest heart rate will
have the slowest
.conduction speed
The fibers are slowest
the more the heart rate




(a) Normal pacemaker activity: Whole train will go **70 mph** (heart rate set by SA node, the fastest autorhythmic tissue).

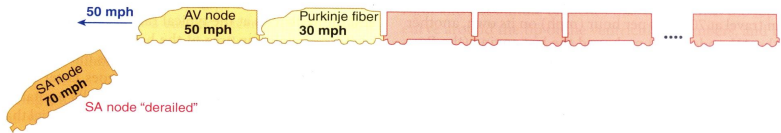

(b) Takeover of pacemaker activity by AV node when the SA node is nonfunctional: Train will go **50 mph** (the next fastest autorhythmic tissue, the AV node, will set the heart rate).

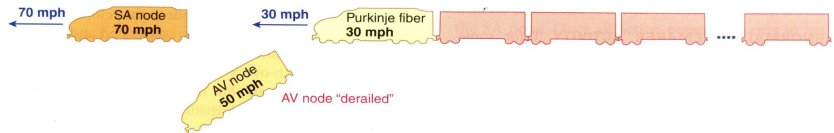

(c) Takeover of ventricular rate by the slower ventricular autorhythmic tissue in complete heart block: First part of train will go **70 mph**; last part will go **30 mph** (atria will be driven by SA node; ventricles will assume own, much slower rhythm).

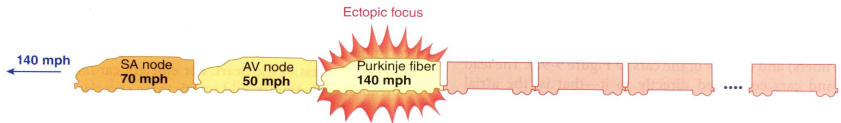


(d) Takeover of pacemaker activity by an ectopic focus: Train will be driven by ectopic focus, which is now going faster than the SA node (the whole heart will be driven more rapidly by an abnormal pacemaker).

Extrinsic Innervation of the Heart

Conduction system = parts
The heart rate that might
occur from each part of the
heart


Action potential of pacemaker
& how it differs from the
contractile fibers

automatic generation of the
heart will control the heart
beating the autonomic nerve
system will only regulate it
Sympathetic &
parasympathetic

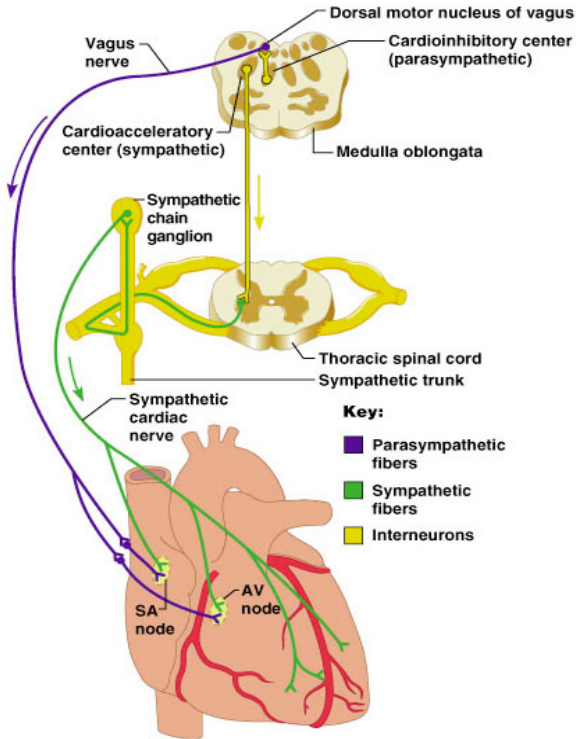


Autonomic Innervation of the Heart

Sympathetic effect is more than the parasympathetic = most of the heart's activity. Sympathetic innervation includes the sinoatrial node & atrioventricular node = upper part of the heart's conduction system. Parasympathetic innervation includes the sinoatrial node & atrioventricular node & some fibers of the arteries.

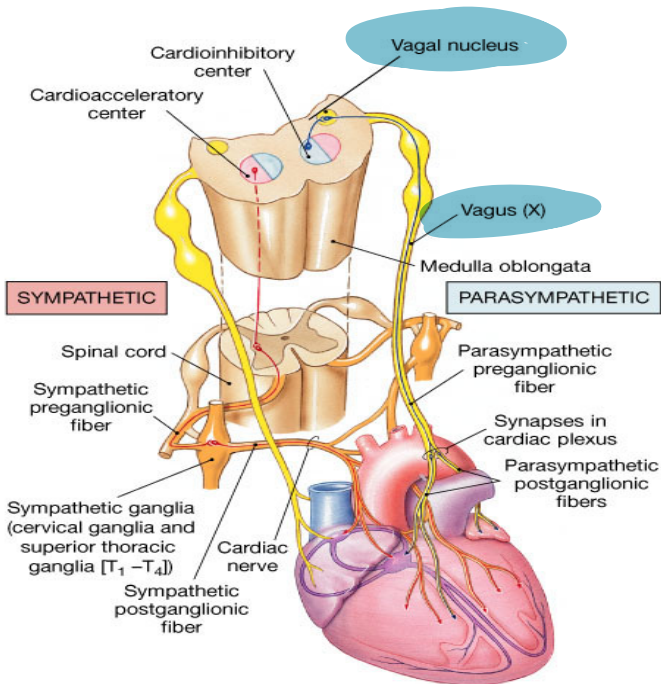

Pacemaker Function

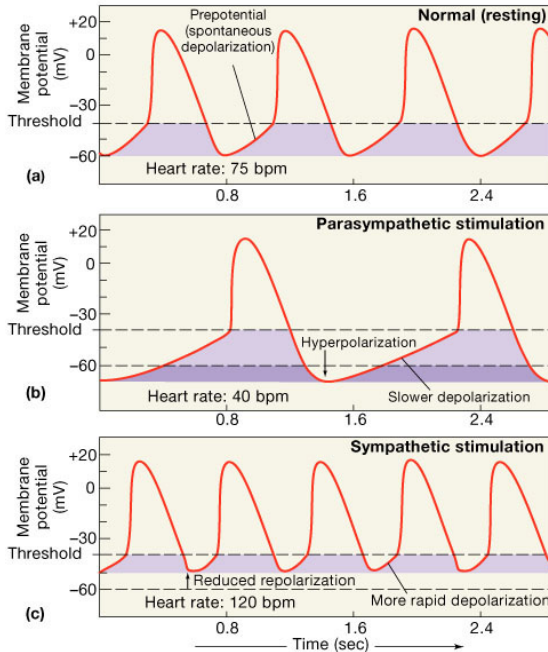



Sympathetic = over riding
 Action potential
 Slow depolarization -
 depolarization -
 repolarization 75 beat per min

Parasympathetic = rest system - lowering the heart beats - over stimulation = slower depolarization & hyper polarization (K^+ will get out of the cell more) more negative resting membrane potential it is harder on the pacemaker to make depolarization - decreasing the heart rate

The opposite will happen in sympathetic
 Resting membrane will be less negative - rapid depolarization increasing the heart rate & reduce the time of action . Increase the conductivity (more heart rate)

Autonomic neurotransmitters affect ion flow to change rate

- **Sympathetic** – increases heart rate by \uparrow Ca^{+2} & I_f channel (net Na^+) flow
- **Parasympathetic** – decreases rate by \uparrow K^+ efflux & \downarrow Ca^{+2} influx

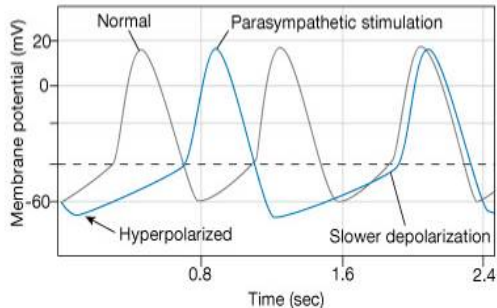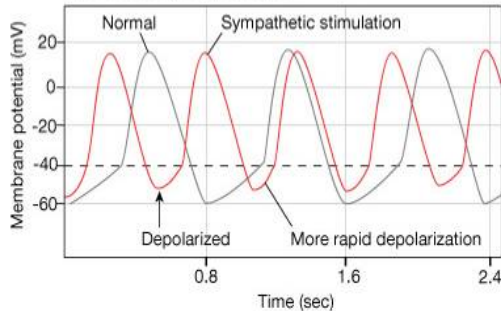

If channels: "funny" because it has effects opposite to those of most other heart currents. It is a mixed $\text{Na}^+ - \text{K}^+$ inward current activated by hyperpolarization and modulated by the autonomic nervous system

'Funny' (f) channels are activated by intracellular cyclic adenosine monophosphate (cAMP) concentrations according to a mechanism mediating regulation of heart rate by the autonomic nervous system, as well as by voltage hyperpolarisation

Regulation of the heart beat

- Sympathetic from the cardiac plexus supplies all parts of the heart (atria, ventricle and all parts of the conduction system)
- Parasympathetic from Vagus nerves supply mainly the atria, SA and AV nodes, very little supply to ventricles
- Sympathetic: increase the permeability of the cardiac cells to Na^+ and Ca^{++} i.e Positive **Chronotropic** and positive **Inotropic** action
- Parasympathetic: Increase the permeability of the cardiac cells to K^+ and decrease its permeability to Na^+ and Ca^{++}

Sinus Node is Cardiac Pacemaker

- Normal rate of discharge in sinus node is 70-80/min.; A-V node - 40-60/min.; Purkinje fibers - 15-40/min.
- Sinus node is pacemaker because of its faster discharge rate
- Intrinsic rate of subsequent parts is suppressed by “Overdrive suppression”

Ectopic Pacemaker



- This is a portion of the heart with a more rapid discharge than the sinus node.
- Also occurs when transmission from sinus node to A-V node is blocked (A-V block).

Parasympathetic Effects on Heart Rate

- Parasympathetic (vagal) nerves, which release acetylcholine at their endings, innervate S-A node and A-V junctional fibers proximal to A-V node.
- Causes hyperpolarization because of increased K^+ permeability in response to acetylcholine.
- This causes decreased transmission of impulses maybe temporarily stopping heart rate.

Sympathetic Effects on Heart Rate

- Releases norepinephrine at sympathetic ending
- Causes increased sinus node discharge (*Chronotropic effect*)
- Increases rate of conduction of impulse (*Dromotropic effect*)
- Increases force of contraction in atria and ventricles (*Inotropic effect*)



Most important to know the conduction system the
Action potential
channels

To know each part of the heart how it is related to the
conduction system

How autonomic nervous system will affect (sympathetic
& parasympathetic)

Last slide is important

Thank You

